





| CHEVY COMMERCIAL Truck model | SERIES | CARGO BOX Length | WHEELBASE (WB) | CAB-TO-AXLE LENGTH (IN.) | MAXIMUM PAYLOAD¹ (LBS.) 2WD/4x4 | STANDARD ENGINE | STANDARD HP @ RPM LBFT. TORQUE @ RPM | OPTIONAL ENGINES |
|--------------------------------------|-------------------------|---------------------|----------------|-----------------------------|--|--|--|---|
| Tahoe | - | - | 116.0" | _ | 1,633/1,606 | Vortec™ 5.3L V8 | 320 @ 5400/335 @ 4000 | _ |
| Suburban | 1/2-Ton | - | 130.0" | - | 1,526/1,580 | Vortec 5.3L V8 | 320 @ 5400/335 @ 4000 | - |
| oubui buii | 3/4-Ton | - | 130.0" | - | 2,459/2,187 | Vortec 6.0L V8 | 352 @ 5400/382 @ 4200 | - |
| | 1500 | 6' 6" | 119.0" | 41.9" | 1,940/1,714 | Vortec 4.3L V6 | 195 @ 4600/260 @ 2800 | Vortec 4.8L V8, Vortec 5.3L V8 |
| Silverado | 1500 | 8' | 133.0" | 55.9" | 1,804/1,794 | Vortec 4.3L V6 | 195 @ 4600/260 @ 2800 | Vortec 4.8L V8, Vortec 5.3L V8 |
| Regular Cab | 2500HD | 8' | 133.7" | 56.0" | 4,212/3,538 | Vortec 6.0L V8 | 360 @ 5400²/380 @ 4200 | Duramax® 6.6L Turbo-Diesel V8 |
| - - | 3500HD SRW ³ | 8' | 133.7" | 56.0" | 4,625/4,609 | Vortec 6.0L V8 | 322 @ 4400/380 @ 4200 | Duramax 6.6L Turbo-Diesel V8 (4x4) |
| | 3500HD DRW ⁴ | 8' | 133.7" | 56.0" | 7,222/6,876 | Vortec 6.0L V8 | 322 @ 4400/380 @ 4200 | Duramax 6.6L Turbo-Diesel V8 (4x4) |
| | 1500 | 6' 6" | 143.5" | 41.9" | 1,908/1,835 | Vortec 4.3L V6 (2WD) Vortec 4.8L V8 (4x4) | 195 @ 4600/260 @ 2800 302 @ 5600/305 @ 4600 | Vortec 4.8L V8 (2WD), Vortec 5.3L V8, Vortec 6.2L V8 |
| | 1500 | 8' | 157.5" | 55.5" | 1,641/1,513 | Vortec 5.3L V8 | 315 @ 5200/335 @ 4000 | - |
| Silverado Extended Cab | 2500HD | 6' 6" | 144.2" | 41.6" | 3,473/3,189 | Vortec 6.0L V8 | 360 @ 5400²/380 @ 4200 | Vortec 6.0L V8 Bi-Fuel (CNG), Duramax 6.6L Turbo-Diesel V8 |
| Extended Cab | 2500HD | 8' | 158.2" | 55.6" | 3,358/3,275 | Vortec 6.0L V8 | 360 @ 5400²/380 @ 4200 | Vortec 6.0L V8 Bi-Fuel (CNG), Duramax 6.6L Turbo-Diesel V8 |
| | 3500HD SRW ³ | 8' | 158.2" | 55.6" | 4,459/4,455 | Vortec 6.0L V8 | 322 @ 4400/380 @ 4200 | Duramax 6.6L Turbo-Diesel V8 |
| | 3500HD DRW ⁴ | 8' | 158.2" | 55.6" | 6,349/6,068 | Vortec 6.0L V8 | 322 @ 4400/380 @ 4200 | Duramax 6.6L Turbo-Diesel V8 |
| | 1500 | 5' 8" | 143.5" | 32.0" | 1,937/1,890 | Vortec 4.8L V8 | 302 @ 5600/305 @ 4600 | Vortec 5.3L V8, Vortec 6.2L V8 |
| | Hybrid⁵ | 5' 8" | 143.5" | 32.0" | 1,527/1,509 | Vortec 6.0L V8 | 332 @ 5100/367 @ 4100 | _ |
| | 2500HD | 6' 6" | 153.7" | 41.6" | 3,347/3,066 | Vortec 6.0L V8 | 360 @ 5400²/380 @ 4200 | Duramax 6.6L Turbo-Diesel V8 |
| Silverado | 2500HD | 8' | 167.7" | 55.6" | 3,247/3,305 | Vortec 6.0L V8 | 360 @ 5400²/380 @ 4200 | Duramax 6.6L Turbo-Diesel V8 |
| Crew Cab | 3500HD SRW ³ | 6' 6" | 153.7" | 41.6" | 4,187/4,190 | Vortec 6.0L V8 | 322 @ 4400/380 @ 4200 | Duramax 6.6L Turbo-Diesel V8 |
| | 3500HD SRW ³ | 8' | 167.7" | 55.6" | 4,308/4,266 | Vortec 6.0L V8 | 322 @ 4400/380 @ 4200 | Duramax 6.6L Turbo-Diesel V8 |
| | 3500HD DRW ⁴ | 8' | 167.7" | 55.6" | 6,245/5,914 | Vortec 6.0L V8 | 322 @ 4400/380 @ 4200 | Duramax 6.6L Turbo-Diesel V8 |
| Silverado Regular Cab Chassis Cab | 3500HD | - | 137.5"/162.0" | 59.8"/84.3" | 7,499/7,066 (59.8" CA) 7,294/6,954 (84.3" CA) | Vortec 6.0L V8 | 322 @ 4400/380 @ 4200 | Duramax 6.6L Turbo-Diesel V8 |
| Silverado Crew Cab Chassis Cab | 3500HD | - | 171.5" | 59.4" | 6,791/6,443 | Vortec 6.0L V8 | 322 @ 4400/380 @ 4200 | Duramax 6.6L Turbo-Diesel V8 |



SILVERADO 1500

A commercial truck pays you back over time by staying on the road and getting the job done. "Silverado delivers the lowest cost of ownership of any full-size pickup," say the experts at *Vincentric*. The hardworking 2013 Silverado 1500 offers an available Vortec 6.2L V8 that generates 403 horses and 417 lb.-ft. of torque.

Extended Cab models with the available MAX Trailering Pack will tow up to 10,700 lbs.² Or haul up to 1,908 lbs. of payload.³ And Silverado offers V8 fuel economy that's unsurpassed in its class.⁴ Silverado — the most dependable, longest-lasting full-size pickups on the road.⁵ And that's the bottom line.

1 Based on Vincentric 2012 Model Level Analysis of 1/2-ton pickups in retail market. 2 Maximum trailer weight ratings are calculated assuming a base vehicle, except for any option(s) necessary to achieve the rating, plus driver. The weight of other optional equipment, passengers and cargo will reduce the maximum trailer weight your vehicle can tow. See your Chevy dealer for additional details. 3 Maximum payload capacity includes weight of driver, passengers, optional equipment and cargo. 4 Based on GM Large Pickup segment and EPA-estimated 15 MPG city/21 highway for Silverado with available 5.3L V8 engine when running on gasoline. 5 Dependability based on longevity: 1981–July 2011 full-size pickup registrations.

SILVERADO 1500 HAS THE "LOWEST OWNERSHIP COST OF ANY FULL-SIZE PICKUP" - VINCENTRIC.COM

| SILVERADO 1500 SELECT S | PECIFICA [®] | TIONS | ■ STANDARD □ AVA | ILABLE – NOTAVAII | LABLE |
|--|--------------------------------------|---|------------------|-------------------|------------------|
| ENGINE AVAILABILITY | HP @ RPM | LBFT. TORQUE @ RPM | REGULAR CAB | EXTENDED CAB | CREW CAB |
| Vortec 4.3L V6 | 195 @ 4600 | 260 @ 2800 | ■ 1 | ■1 | _ |
| Vortec 4.8L FlexFuel ² V8 | 302 @ 5600 | 305 @ 4600 | ■3 | 4 | ■ 5 |
| Vortec 5.3L FlexFuel ² V8 | 315 @ 5200 | 335 @ 4000 | | ■ 6 | 7 |
| Vortec 6.2L FlexFuel ² V8 | 403 @ 5700 | 417 @ 4300 | - | □8 | □8 |
| TRANSMISSION/TRANSFE | R CASE AVAILAE | SILITY | REGULAR CAB | EXTENDED CAB | CREW CAB |
| Hydra-Matic® 4-speed automatic wi | th overdrive and | Tow/Haul mode | • | | • |
| Hydra-Matic 6-speed automatic wi Driver Shift Control, auto grade | th overdrive, Tap braking and Tow | -Up/Tap-Down /Haul mode ⁹ | | | |
| Transfer case: 2-speed, | floor-mounted (| 4x4) | - | • | - |
| Transfer case: Active, Autotrac | ® with electronic | shift (4x4) | | | |
| CHASSIS FE | ATURES | | REGULAR CAB | EXTENDED CAB | CREW CAB |
| Alternator: | 145-amp | | • | | • |
| 160-an | 1p ¹⁰ | | | - | - |
| Brakes: 4-wheel antilock with [| ynamic Rear Pro | pportioning | - | | - |
| Front rotor diamete | r and thickness | | 13.0" x 1.2" | 13.0" x 1.2" | 13.0" x 1.2" |
| Rear drum diame | ter and width | 11.6" x 2.4" | 11.6" x 2.4" | 11.6" x 2.4" | |
| Front Gross Axle | Weight Rating | | 3,200-3,950 lbs. | 3,600-3,950 lbs. | 3,650-3,950 lbs. |
| Rear Gross Axle V | Veight Rating | 3,750-3,950 lbs. | 3,750-4,200 lbs. | 3,750-4,200 lbs. | |



SILVERADO HYBRID¹¹

Chevy Silverado Hybrid offers an EPA-estimated 20 MPG city/23 highway. And it has the power and performance you can count on: 332 horsepower, 367 lb.-ft. of torque, up to $6,\!100$ lbs. of towing capability $(2WD)^{12}$ and a payload capacity of up to $1,\!527$ lbs. 13


¹ Work Truck only. Regular Cab Standard Box 2WD and 4x4, Regular Cab Long Box 2WD and 4x4, and Extended Cab Standard Box 2WD only. 2 E85 is a combination of 85% ethanol and 15% gasoline. Go to chevy.com/biofuels to see if there is an E85 fuel station near you. When running on E85, Silverado 1500 with 4.8L V8 engine offers an EPA-estimated 10 MPG city/14 highway; Silverado 1500 with 5.3L V8 engine offers an EPA-estimated 9 MPG city/13 highway. 3 Standard on LT. 4 Standard on Standard Box LS and LT. 5 Standard on WT, LS and LT. 6 Standard on Standard Box LT2 and all Long Box models. 7 Standard on LT2. 8 LT and LTZ only. 9 Requires available Vortec 5.3L V8 or Vortec 6.2L V8 engine. 10 Requires available Snow Plow Prep Package. 11 Available at participating dealers. 12 Maximum trailer weight ratings are calculated assuming a base vehicle, except for any option(s) necessary to achieve the rating, plus driver. The weight of other optional equipment, passengers and cargo will reduce the maximum trailer weight your vehicle can tow. See your Chevy dealer for additional details. 13 Maximum payload capacity includes weight of driver, passengers, optional equipment and cargo.



SILVERADO 2500HD AND 3500HD, CONTINUING THE LOWEST COST OF OWNERSHIP

Silverado HD not only delivers on the toughest tasks. According to $Vincentric^1$ it also delivers the lowest cost of ownership of any full-size pickup. And Chevy packs even more muscle into Silverado HD, making it our most powerful heavy duty yet. The available, proven Duramax 6.6L Turbo-Diesel V8 engine and renowned Allison® transmission deliver 397 horsepower and 765 lb.-ft. of torque, providing towing capabilities up to 23,100 lbs? The Vortec 6.0L V8 gas engine with Variable Valve Timing (VVT) offers up to 360 horsepower³ and 380 lb.-ft. of torque, and it's paired with a Hydra-Matic 6-speed automatic transmission. Three cab configurations, two box lengths, two drive types -2WD and 4x4- and both single and dual rear wheel options add up to 24 cab/box/drive/rear wheel combinations. With a high-strength, fully boxed steel frame that handles payloads up to 7,222 lbs.4 this is the strongest Silverado HD ever.

| SILVERADO 2500HD/3500H | D SELECT | SPECIFICATION | S = STANDARD | □ AVAILABLE - N | IOT AVAILABLE |
|---|-------------------------|--------------------|------------------|------------------|------------------|
| ENGINE AVAILABILITY | HP @ RPM | LBFT. TORQUE @ RPM | REGULAR CAB | EXTENDED CAB | CREW CAB |
| Vortec 6.0L FlexFuel ⁵ V8 (2500HD) | 360 @ 5400 ⁶ | 380 @ 4200 | | | • |
| Vortec 6.0L V8 (Bi-Fuel CNG) Running on Gas | 360 @ 5400 | 380 @ 4200 | - | □7 | - |
| Vortec 6.0L V8 (Bi-Fuel CNG) Running on CNG | 301 @ 5000 | 333 @ 4200 | - | □7 | - |
| Vortec 6.0L FlexFuel ⁵ V8 (3500HD) | 322 @ 4400 | 380 @ 4200 | • | • | • |
| Duramax 6.6L Turbo-Diesel V8 ⁸ | 397 @ 3000 | 765 @ 1600 | | | |
| TRANSMISSION/TRANSFE | R CASE AVAILAB | ILITY | REGULAR CAB | EXTENDED CAB | CREW CAB |
| Hydra-Matic 6-speed automatic wit Driver Shift Control, auto grade b | | | • | • | • |
| Allison 1000 Series 6-speed automatic Driver Shift Control, auto grade b | | | | | |
| Transfer case: 2-speed, f | loor-mounted (4 | 1x4) | • | • | |
| Transfer case: Electronic-shift, ins | trument panel-r | mounted (4x4) | | | |
| CHASSIS FE/ | ATURES | | REGULAR CAB | EXTENDED CAB | CREW CAB |
| Alternator: 1 | 25-amp | | | | • |
| Dual 125-a | mp ¹¹ | | | | |
| 160-am | p ¹² | | | | |
| Front Gross Axle V | leight Rating | | 4,400-6,000 lbs. | 4,400-6,000 lbs. | 4,400-6,000 lbs |
| Rear Gross Axle W | eight Rating | | 6,200-9,825 lbs. | 6,200-9,375 lbs. | 6,200-9,375 lbs. |





AVAILABLE DURAMAX DIESEL POWER

The proven 397-horsepower Duramax 6.6L Turbo-Diesel V8 is teamed with the renowned Allison 6-speed automatic transmission.

SILVERADO 2500HD AND 3500HD

There's no quitting time for an industrial-strength tool. Silverado HD Work Truck runs as hard and as long as you do. With a high-strength steel frame and wide rear leaf springs, Silverado 3500HD can handle up to 7,222 lbs. of payload. The fully boxed frame is 30 times torsionally stronger than a Ford Super Duty.

1 Requires Regular Cab model and gas engine. Maximum payload capacity includes weight of driver, passengers, optional equipment and cargo. Cargo and load capacity limited by weight and distribution. 2 Monthly rates apply. Visit autonetmobile.com for details and coverage map.

WI-FI BY AUTONET MOBILE

Equip an HD with the available dealer-installed Chevrolet Wi-Fi by Autonet Mobile² and every job site is a hot spot. It pays, literally, to have the right truck on the job.

Silverado 2500HD Regular Cab Long Box WT 4x4 shown in Summit White with available features.





BI-FUEL GAS OPTION

Continuing a commitment to cleaner, more efficient vehicles, Chevrolet is offering fleet and retail customers the new "bi-fuel" factory option on Silverado 2500HD Extended Cab models. The bi-fuel Silverado 2500HD has a specially designed Vortec 6.0L V8 engine and will be available in Standard and Long Box, with either 2-wheel or 4-wheel drive. It allows Silverado 2500HD to seamlessly switch between traditional gasoline and compressed natural gas (CNG) and provides a total range of more than 650 miles¹ without sacrificing the power or performance that have made the truck line legendary. The bi-fuel Silverado has a comprehensive 100,000-mile/5-year transferable Powertrain Limited Warranty.²

1 Estimated range based on GM testing and maximum tank capacity. Your range may be less. 2 Whichever comes first. See dealer for details.



SNOW PLOW PREP PACKAGE

Every HD 4x4 model can easily accommodate a snow plow with the available Snow Plow Prep Package, thanks to massive forged and precision-machined upper control arms and a Front Gross Axle Weight Rating of up to 6,000 lbs.



SILVERADO 3500HD CHASSIS CAB

A sturdy, dependable base. Deep down, nothing's more important in an upfitted vehicle. With Gross Vehicle Weight Ratings up to 13,200 lbs., Silverado Chassis Cab is the platform to build on. Two engine choices supply the power you expect — the standard Vortec 6.0L V8 and the available Duramax 6.6L Turbo-Diesel V8 that offers best-in-class HD Chassis Cab horsepower and torque. Heavy-duty automatic transmission options include the Hydra-Matic 6-speed paired with the Vortec V8 and the rugged Allison 1000 Series 6-speed mated to the Duramax Diesel. Standard features include auto grade braking, 4-wheel disc brakes with ABS and Dynamic Rear Proportioning. Whatever you build onto your truck, you want Chevy at the heart of it all.

| SILVERADO CHASSIS CAB SI | ELECT SPECIFI | CATIONS = STANDARD = AVAILABLE - | NOT AVAILABLE | | | | | | | |
|---|--|----------------------------------|------------------|--|--|--|--|--|--|--|
| ENGINE AVAILABILITY | HP @ RPM | LBFT. TORQUE @ RPM | 3500HD | | | | | | | |
| Vortec 6.0L V8 | 322 @ 4400 | 380 @ 4200 | • | | | | | | | |
| Duramax 6.6L Turbo-Diesel V8 | 397 @ 3100 | 765 @ 1600 | | | | | | | | |
| TRAN | TRANSMISSION/TRANSFER CASE AVAILABILITY | | | | | | | | | |
| Hydra-Matic 6-speed automatic with overdri | • | | | | | | | | | |
| Allison 1000 Series 6-speed automatic with over | lison 1000 Series 6-speed automatic with overdrive, Tap-Up/Tap-Down Driver Shift Control, auto grade braking and Tow/Haul mode | | | | | | | | | |
| Tran | • | | | | | | | | | |
| Transfer case | | | | | | | | | | |
| | 3500HD | | | | | | | | | |
| | Alternator: 125- | атр | • | | | | | | | |
| | Dual 125-amp | 4 | | | | | | | | |
| | 160-amp⁵ | | | | | | | | | |
| Brakes: 4-wh | eel antilock disc with Dy | namic Rear Proportioning | • | | | | | | | |
| | Front rotor diameter an | d thickness | 13.9" x 1.6" | | | | | | | |
| | Rear rotor diameter and | d thickness | 13.9" x 1.6" | | | | | | | |
| | Differential: Automatic | locking rear | | | | | | | | |
| | • | | | | | | | | | |
| | Front Gross Axle Weig | ht Rating | 4,400-6,000 lbs. | | | | | | | |
| | Rear Gross Axle Weight Rating | | | | | | | | | |



POWER TAKEOFF (PTO) CAPABILITY⁶

PTO capability allows HD Chassis Cab, with the available Duramax 6.6L Turbo-Diesel V8 engine, to power auxiliary equipment like a dump body or hydraulic motors for generators and tools. This feature runs off the available Allison 1000 Series 6-speed automatic transmission.



The best fleet vehicles hold up better and stay in service longer. They also meet all the demands your job throws at you — plus the ones that haven't popped up yet. Captiva Sport is a contemporary 5-passenger crossover featuring versatility, roominess and efficiency, plus the power of an ECOTEC 2.4L 4-cylinder engine with a 6-speed automatic transmission.

StabiliTrak Electronic Stability Control System and Traction Control are standard. The 2013 Captiva Sport line includes LS, LT and uplevel LTZ versions. The LTZ has a rear vision camera, leather-appointed and heated front seats, 10-speaker sound system and sunroof. Available only for fleet customers.

REPORTING FOR DUTY

TAHOE IS BIG - SUBURBAN IS BIGGER

These two have the room, power and capability few vehicles can match. Tahoe is available with Police and Special Service packages for standard patrol, hazmat, K-9, medical first responder or tactical operations. Both Tahoe and Suburban are available with a fleet package for other applications. Then there's Tahoe Hybrid.¹ It's the most fuel-efficient full-size SUV in America.² The iconic Chevy Suburban is in a class by itself with available seating for up to nine and more cargo room than any competitor.

TAHOE SPECIAL SERVICE VEHICLE

The Vortec 5.3L V8 engine is E85 FlexFuel-capable? Paired with a standard 6-speed automatic transmission, it allows Tahoe to tow up to 8,200 lbs! Electric Trailer Sway Control and Hill Start Assist are standard.

Tahoe shown with available Police Package, aluminum wheels and aftermarket equipment.

1 Available at participating dealers. 2 EPA-estimated 20 MPG city/23 highway. Based on GM Large Utility segment. 3 E85 is a combination of 85% ethanol and 15% gasoline. Go to chevy.com/biofuels to see if there is an E85 fuel station near you. When running on E85, Tahoe offers an EPA-estimated 11 MPG city/16 highway. 4 Maximum trailer weight ratings are calculated assuming a base vehicle, except for any option(s) necessary to achieve the rating, plus driver. The weight of other optional equipment, passengers and cargo will reduce the maximum trailer weight your vehicle can tow. See your Chevy dealer for additional details.



| CHEVY Commercial Van Model | TRIM/SERIES | DRIVE | WHEELBASE (WB) | STANDARD ENGINE | STANDARD HP @ RPM/ LBFT. TORQUE @ RPM | OPTIONAL ENGINES | MAXIMUM PAYLOAD ² | CARGO SPACE ³ (CU. FT.) | STANDARD SEATING | OPTIONAL SEATING |
|----------------------------------|---------------|-------|----------------|-----------------------------|--|--|---------------------------------|---------------------------------------|---------------------|---------------------|
| | 1500 | RWD | 135" | Vortec 4.3L V6 | 195 @ 4600/260 @ 2800 | Vortec 5.3L V8 | 2,360 lbs. | 239.7 | 2 | 1 |
| | 1500 AWD | AWD | 135" | Vortec 5.3L V8 | 310 @ 5200/334 @ 4500 | – Vortec 6.0L V8, | 1,995 lbs. | 239.7 | 2 | 1 |
| F | 2500 Regular | RWD | 135" | Vortec 4.8L V8 | 280 @ 5200/295 @ 4600 | Vortec 6.0L V8 (CNG), Duramax 6.6L Turbo-Diesel V8 | 3,287 lbs. | 239.7 | 2 | 1 |
| Express Cargo Van | 2500 Extended | RWD | 155" | Vortec 4.8L V8 | 280 @ 5200/295 @ 4600 | Duramax 6.6L Turbo-Diesel V8 | 3,073 lbs. | 284.4 | 2 | 1 |
| ourgo van | 3500 Regular | RWD | 135" | Vortec 4.8L V8 | 280 @ 5200/295 @ 4600 | Vortec 6.OL V8, Vortec 6.OL V8 (CNG), Duramax 6.6L Turbo-Diesel V8 | 4,186 lbs. | 239.7 | 2 | 1 |
| | 3500 Extended | RWD | 155" | Vortec 4.8L V8 | 280 @ 5200/295 @ 4600 | Vortec 6.0L V8 Duramax 6.6L Turbo-Diesel V8 | 4,011 lbs. | 284.4 | 2 | 1 |
| Express | 3500 | RWD | 139"/159" | Vortec 4.8L V8 ⁴ | 280 @ 5200/295 @ 4600 | Vortec 6.0L V8 Duramax 6.6L Turbo-Diesel V8 | 7,307 lbs./ 7,310 lbs. | - | 2 | 1 |
| Commercial | 3500 | RWD | 177" | Vortec 6.0L V8 | 324 @ 4700/373 @ 4400 | Duramax 6.6L Turbo-Diesel V8 | 7,248 lbs. | - | 2 | 1 |
| Cutaway | 4500 | RWD | 159"/177" | Vortec 6.0L V8 | 324 @ 4700/373 @ 4400 | Vortec 6.0L V8 (LPG) (159" WB only) Duramax 6.6L Turbo-Diesel V8 | 9,156 lbs./ 7,796 lbs. | - | 2 | 1 |
| | 1500 | RWD | 135" | Vortec 5.3L V8 | 310 @ 5200/334 @ 4500 | _ | 1,779 lbs. | 216.2 ⁵ | 8 | _ |
| | 1500 AWD | AWD | 135" | Vortec 5.3L V8 | 310 @ 5200/334 @ 4500 | _ | 1,560 lbs. | 216.2 ⁵ | 8 | _ |
| Everence | 2500 | RWD | 135" | Vortec 4.8L V8 | 280 @ 5200/295 @ 4600 | Vortec 6.0L V8 | 2,705 lbs. | 216.25 | 12 | 8 |
| Express Passenger Van | 3500 Regular | RWD | 135" | Vortec 4.8L V8 | 280 @ 5200/295 @ 4600 | Vortec 6.0L V8, Duramax 6.6L Turbo-Diesel V8 | 3,491 lbs. | 216.25 | 12 | 8 |
| | 3500 Extended | RWD | 155" | Vortec 4.8L V8 | 280 @ 5200/295 @ 4600 | Vortec 6.0L V8, Duramax 6.6L Turbo-Diesel V8 | 3,171 lbs. | 252.85 | 12 | 15 |

¹ Based on Vincentric 2012 Model Level Analysis. 2 Maximum payload capacity includes weight of driver, passengers, optional equipment and cargo. Higher payloads (where available) require optional equipment. 3 Cargo and load capacity limited by weight and distribution. 4 On vehicles weighing less than 10,000 lbs. 5 With all rear passenger seats removed.



CHEVY EXPRESS CARGO VANS

Cargo Vans offer a variety of fuel options. Choose from models powered by gasoline, diesel (with the available Duramax Turbo-Diesel V8) or compressed natural gas (CNG). The available Vortec 4.8L, 5.3L and 6.0L engines can operate on either regular unleaded gasoline, E85¹ – a blend of 85% ethanol and 15% gasoline – or a combination of both. See chevy.com for more information.

| EXPRESS CARGO VA | N SELEC | T SPECIFICATION | IS | ■ STA | NDARD 🗆 A | VAILABLE - | - NOT AVAIL | ABLE |
|--|---------------------------|----------------------|--------------|--------------|--------------|--------------|--------------|--------------|
| ENGINE AVAILABILITY | HP @ RPM | LBFT. TORQUE @ RPM | 1500 | 1500 AWD | 2500 | 2500 EXT | 3500 | 3500 EXT |
| Vortec 4.3L V6 | 195 @ 4600 | 260 @ 2800 | | _ | _ | _ | _ | _ |
| Vortec 4.8L FlexFuel ¹ V8 | 280 @ 5200 | 295 @ 4600 | - | - | | | • | |
| Vortec 5.3L FlexFuel ¹ V8 | 310 @ 5200 | 334 @ 4500 | | • | - | - | - | - |
| Vortec 6.0L FlexFuel ¹ V8 | 324 @ 4700 | 373 @ 4400 | - | - | | | | |
| Vortec 6.0L V8 (CNG) | 279 @ 4700 | 320 @ 4400 | - | - | | - | | - |
| Duramax 6.6L Turbo-Diesel V8 | 260 @ 3100 | 525 @ 1600 | - | - | | | | |
| TRANSMISSION/TR | ANSFER CASE A | VAILABILITY | 1500 | 1500 AWD | 2500 | 2500 EXT | 3500 | 3500 EXT |
| Hydra-Matic 4-speed automa | itic with overdri | ve and Tow/Haul mode | • | • | _ | _ | - | - |
| Hydra-Matic 6-speed automa Driver Shift Control, auto | | | - | - | • | • | • | • |
| CHAS | SIS FEATURES | | 1500 | 1500 AWD | 2500 | 2500 EXT | 3500 | 3500 EXT |
| Altern | nator: 125-amp | | □2 | | _ | _ | _ | _ |
| | 145-amp | | 3 | _ | □4 | □4 | □4 | □4 |
| | 105-amp | | - | _ | | | | |
| Dua | al 145-amp⁵ | | - | - | | | | |
| Batto | ery: 600-cca ⁶ | | | | | | | |
| High-ca | apacity 770-cca | 6 | | | □7 | □7 | □7 | □7 |
| Brakes: Power, hydr | aulic 4-wheel ve | entilated disc | • | • | • | • | • | • |
| 4-wheel antilock with | h Dynamic Rear | Proportioning | • | • | • | • | • | • |
| Front rotor di | iameter and thic | ckness | 12.0" x 1.1" | 12.0" x 1.1" | 12.8" x 1.5" | 12.8" x 1.5" | 12.8" x 1.5" | 12.8" x 1.5" |
| Rear rotor di | ameter and thic | kness | 13.0" x 1.2" | 13.0" x 1.2" | 13.0" x 1.1" | 13.0" x 1.1" | 13.0" x 1.1" | 13.0" x 1.1" |
| Differential: A | Automatic lockir | ng rear | | | | | | |
| Front Gross | s Axle Weight Ra | ting | 3,600 lbs. | 3,700 lbs. | 4,100 lbs. | 4,300 lbs. | 4,600 lbs. | 4,600 lbs. |
| Rear Gross | Axle Weight Rat | ting | 4,000 lbs. | 4,000 lbs. | 5,360 lbs. | 5,360 lbs. | 6,084 lbs. | 6,084 lbs. |



PROTECTED AND CONNECTED. With OnStar,®8 experience the safe, simple way to stay connected on the road. OnStar is now standard on all Passenger Van models — available on Cargo Van and Commercial Cutaway — with the Directions & Connections® Plan for the first six months.

1 E85 is a combination of 85% ethanol and 15% gasoline. Go to chevy.com/biofuels to see if there is an E85 fuel station near you. 2 Requires available Vortec 5.3L V8 engine.
3 Standard with Vortec 4.3L V6 engine. 4 Standard with Duramax 6.6L Turbo-Diesel V8 engine. 5 Requires available Duramax 6.6L Turbo-Diesel V8 engine and air conditioning.
6 Cold-cranking amps. 7 Duramax 6.6L Turbo-Diesel V8 engine comes with standard dual 770-cca batteries. 8 Visit onstar.com for coverage map, details and system limitations. Services vary by model and conditions. 9 Estimated range based on GM testing and maximum tank capacity. Your range may be less. 10 Whichever comes first. See dealer for details.



AVAILABLE ACCESS PACKAGES

These packages offer easy interior access to tools and cargo. Each includes three exterior, remote-release, side-access panels that can be opened by Remote Keyless Entry. Not available with optional driver-side 60/40 swing-out doors or sliding passenger-side door.



NEW COMPRESSED NATURAL GAS (CNG) OPTION ON EXPRESS

Express 2500 and 3500 Cargo Vans with the CNG option are available with a 3-tank or 4-tank system. The 3-tank system provides a range of up to approximately 200 miles,9 while the 4-tank system provides a range of up to 300 miles.9 GM is the only manufacturer with a fully integrated CNG option for vans and offers a 5-year/100,000-mile transferable Powertrain Limited Warranty10 on Express Cargo Vans with CNG.

Express 1500 Cargo Van shown in Sheer Silver Metallic with available features.

SAFETY DRIVES US



CHEVY EXPRESS

When you're transporting people for a living, safety is paramount. The Chevy Express Passenger Van offers standard safety features such as head-curtain side-impact air bags, the StabiliTrak Electronic Stability Control System, a Tire Pressure Monitoring System (except spare tire) and antilock brakes. Enhanced Technology Glass (ETG)² for a quiet ride is standard on 12- and 15-passenger models. And you can easily tailor the Express Van to your exact needs with a choice of 8-, 12- and 15-passenger seating configurations, depending on model.

REAR VISION CAMERA AND REAR PARK ASSIST

An available integral rear vision camera and Rear Park Assist help you detect certain stationary objects located behind the vehicle when traveling in reverse at low speeds.

1 Always use safety belts and the correct restraint for your child's age and size. Even in vehicles equipped with the Passenger Sensing System, children are safer when properly secured in a rear seat in the appropriate infant, child or booster seat. Never place a rear-facing infant restraint in the front seat of any vehicle equipped with a passenger air bag. See the Owner's Manual and the child safety seat instructions for more safety information. 2 ETG is part of the overall occupant protection system on Passenger Vans. ETG may help keep passengers sitting next to these windows from being ejected through the glass in some, but not all, crashes. Even with this glass, safety belts must be worn at all times. For Passenger Vans, use only ETG glass approved for your vehicle for replacement when damaged. Standard with Duramax 6.6L Turbo-Diesel V8.

EXPRESS PASSENGER VAN 1500, 1500 AWD, 2500, 3500 AND 3500 EXT

| EXPRESS PASSENGE | R VAN SEL | ECT SPECIFICATI | IONS | = STANDARD | □ AVAILABLE | – NOT AVAII | ABLE |
|---|--------------------|---------------------|--------------|--------------|--------------|--------------|--------------|
| ENGINE AVAILABILITY | HP@RPM | LBFT. TORQUE @ RPM | 1500 | 1500 AWD | 2500 | 3500 | 3500 EXT |
| Vortec 5.3L FlexFuel¹ V8 | 310 @ 5200 | 334 @ 4500 | | | _ | - | _ |
| Vortec 4.8L FlexFuel¹ V8 | 280 @ 5200 | 295 @ 4600 | - | - | | | |
| Vortec 6.0L FlexFuel ¹ V8 | 324 @ 4700 | 373 @ 4400 | - | _ | | | |
| Duramax 6.6L Turbo-Diesel V8 | 260 @ 3100 | 525 @ 1600 | - | - | - | | |
| TRANSMISSION/TF | RANSFER CASE AV | /AILABILITY | 1500 | 1500 AWD | 2500 | 3500 | 3500 EXT |
| Hydra-Matic 4-speed autom | atic with overdriv | e and Tow/Haul mode | | | - | - | _ |
| Hydra-Matic 6-speed autom Driver Shift Control, auto | | | - | - | • | • | - |
| CHAS | SSIS FEATURES | | 1500 | 1500 AWD | 2500 | 3500 | 3500 EXT |
| All-Wi | heel Drive (AWD) | | _ | • | _ | _ | _ |
| Alter | nator: 105-amp | | - | - | | | - |
| | 125-amp | | - | • | - | - | - |
| | 145-amp | | □2 | □2 | □2 | □2 | • |
| Brakes: Power, hyd | raulic 4-wheel ve | ntilated disc | | | • | | • |
| 4-wheel antilock wit | th Dynamic Rear I | Proportioning | | • | • | | • |
| Front rotor d | liameter and thic | kness | 12.0" x 1.1" | 12.0" x 1.1" | 12.8" x 1.5" | 12.8" x 1.5" | 12.8" x 1.5" |
| Rear rotor d | iameter and thicl | rness | 13.0" x 1.2" | 13.0" x 1.2" | 13.0" x 1.1" | 13.0" x 1.6" | 13.0" x 1.6" |
| 0il | -Life Monitor | | | | | | |
| StabiliTrak Electro | onic Stability Con | trol System | | • | | | • |
| Ste | eering: Power | | | | | | |
| Front Gros | s Axle Weight Ra | ting | 3,600 lbs. | 3,700 lbs. | 4,100 lbs. | 4,600 lbs. | 4,600 lbs. |
| Rear Gros | s Axle Weight Rat | ing | 4,000 lbs. | 4,000 lbs. | 5,360 lbs. | 6,084 lbs. | 6,084 lbs. |



MOBILITY VEHICLES

We want to make it easy and safe for people with special needs (and those who care for them) to travel. Express provides abundant interior space and accessibility that wheelchair and scooter users appreciate. Express is a practical choice for mobility and paratransit conversions. It's designed to allow easy installation of adaptive equipment and mobility accessories like wheelchair lifts, ramps, running boards and driver aids, available from independent aftermarket suppliers.

EXPRESS 3500 AND 4500 CUTAWAY

Express Commercial Cutaways are built on a proven foundation with a full-length, ladder-type frame designed for upfitting. Three wheelbases are available: 139-inch, 159-inch and 177-inch. Vortec V8 power is standard, along with a Hydra-Matic 6-speed automatic transmission that includes auto grade braking and Tow/Haul mode. The available Duramax 6.6L Turbo-Diesel V8 is the most powerful diesel in its class. The Express Commercial Cutaway is designed to meet many requirements — every one of which starts with the power, strength and dependability of a proven Chevrolet chassis.


| EXPRESS COMMERC | IAL CUTAV | VAY SELECT SPEC | IFICATIO | NS = STA | NDARD □ AV | AILABLE - N | OTAVAILABLE |
|--|----------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| ENGINE AVAILABILITY | HP @ RPM | LBFT. TORQUE @ RPM | 139" WHEELBASE (3500) | 159" WHEELBASE (3500) | 177" WHEELBASE (3500) | 159" WHEELBASE (4500) | 177" WHEELBASE (4500) |
| Vortec 4.8L V8 | 280 @ 5200 | 295 @ 4600 | | | _ | _ | - |
| Vortec 6.0L V8 | 324 @ 4700 | 373 @ 4400 | | | | | |
| Vortec 6.0L V8 (LPG) | 332 @ 4800 | 370 @ 4400 | _ | _ | _ | | - |
| Duramax 6.6L Turbo-Diesel V8 | 260 @ 3100 | 525 @ 1600 | | | | | |
| TRANSMISSION/T | RANSFER CASE AV | /AILABILITY | 139" WHEELBASE (3500) | 159" WHEELBASE (3500) | 177" WHEELBASE (3500) | 159" WHEELBASE (4500) | 177" WHEELBASE (4500) |
| Hydra-Matic 6-speed auton Driver Shift Control, aut | | | • | • | • | • | • |
| CHA | SSIS FEATURES | | 139" WHEELBASE (3500) | 159" WHEELBASE (3500) | 177" WHEELBASE (3500) | 159" WHEELBASE (4500) | 177" WHEELBASE (4500) |
| Alter | nator: 145-amp | | | | | | |
| D | ual 145-amp | | □1 | □1 | □1 | □1 | □1 |
| Bat | tery: 600-cca² | | | | | • | - |
| High-c | capacity 770-cca² | | □3 | □3 | □3 | □3 | □3 |
| Brakes: power, hyd | raulic 4-wheel ve | ntilated disc | • | • | • | • | • |
| 4-wheel antilock wi | th Dynamic Rear | Proportioning | • | • | • | • | • |
| Front rotor (| diameter and thic | kness | 12.8" x 1.5" | 13.0" x 1.1" | 13.0" x 1.1" | 13.0" x 1.1" | 13.0" x 1.1" |
| Rear rotor o | liameter and thicl | kness | 12.8" x 1.8" | 13.58" x 1.6" | 13.58" x 1.6" | 13.58" x 1.6" | 13.58" x 1.6" |
| Differential: | Automatic locking | g rear | | | • | | - |
| 0i | l-Life Monitor | | | | | | |
| St | eering: Power | | | | • | • | • |
| Suspension, front: independent v | vith 35mm tubulaı | stabilizer and coil springs | • | • | • | • | • |
| A | xle capacity | | 4,300 lbs. | 4,100 lbs. | 4,600 lbs. | 4,600 lbs. | 4,600 lbs. |
| Suspension, rear: hypo | id drive axle with I | multileaf springs | • | | • | | • |
| Axle capa | city (standard GV\ | VR) | 6,084 lbs. | 7,500 lbs. | 8,600 lbs. | 9,600 lbs. | 9,600 lbs. |








LPG vehicles make business sense for many fleets. That's why the LPG option is now available on Express 4500 Cutaway Vans in a 3-tank or 4-tank system. The vehicle is built with a gaseous fuel-ready 6.0L Vortec V8 engine with factory-installed hardened exhaust valves and intake/exhaust valve seats. Engineered by GM, all components meet GM standards for safety, reliability and durability, and are backed by a comprehensive 5-year/100,000-mile transferable Powertrain Limited Warranty.¹ Visit chevy.com for more information.

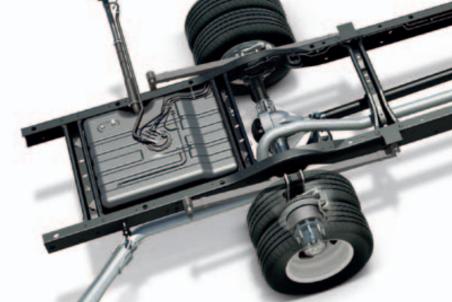


EXPRESS 4500 COMMERCIAL CUTAWAY

Express 4500 Commercial Cutaway offers 159-inch and the new 177-inch wheelbase options. It's the perfect platform for numerous upfits, including a school bus,²




COMMERCIAL VEHICLE DIMENSIONS


SILVERADO

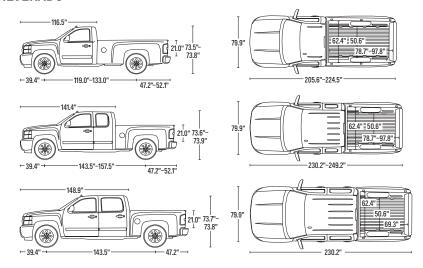

SILVERADO 3500HD REGULAR CAB CHASSIS CAB




SILVERADO 3500HD CREW CAB CHASSIS CAB




EXPRESS CARGO VAN 135.0" Wheelbase/155.0" Wheelbase




EXPRESS COMMERCIAL CUTAWAY 139.0" Wheelbase/159.0" Wheelbase/177.0" Wheelbase



SILVERADO HD

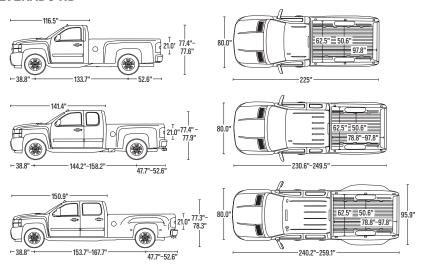



SUBURBAN



TAHOE










CAPTIVA SPORT







EXPRESS PASSENGER VAN 135.0" Wheelbase/155.0" Wheelbase



SILVERADO 1500 CONVENTIONAL TRAILER WEIGHT RATINGS¹

| | | | | REGUL/ | AR CAB | | | EXTEN | DED CAB | | CREW CAB | |
|---|------------|-------------------|------------------|-----------------|------------------|--------------|------------------|--------------|------------------|--------------|---------------|---------------|
| ENGINE | AXLE RATIO | GCWR ² | STANDARD BOX 2WD | LONG BOX 2WD | STANDARD BOX 4x4 | LONG BOX 4x4 | STANDARD BOX 2WD | LONG BOX 2WD | STANDARD BOX 4x4 | LONG BOX 4x4 | SHORT BOX 2WD | SHORT BOX 4x4 |
| Vortec 4.3L V6 | 3.73 | 10,000 | 5,400 | 5,200 | 5,100 | 4,900 | - | - | - | - | - | - |
| VUITEC 4.3L VO | 3.23 | 9,500 | 4,800 | 4,700 | - | - | 4,400 | - | - | - | - | - |
| | 3.73 | 12,000 | 7,200 | 7,100 | - | - | 6,700 | - | - | - | 6,700 | - |
| Vortec 4.8L V8 | 3.42 | 11,000 | - | - | 6,000 | 5,800 | - | - | 5,500 | - | - | 5,500 |
| VUITEC 4.OL VO | 3.23 | 10,000 | - | 5,100 | - | - | 4,700 | - | - | - | 4,700 | - |
| | 3.23 | 9,500 | 4,700 | - | - | - | - | - | - | - | - | - |
| | 3.42 | 15,000 | - | 10,000 | - | 9,800 | 9,700 | 9,500 | 9,600 | 9,300 | 9,600 | 9,500 |
| Vortec 5.3L V8 with Heavy-Duty Cooling Package | 3.42 | 14,000 | 9,100 | - | 8,900 | - | - | - | - | - | - | - |
| ooomig i dekage | 3.08 | 12,200 | 7,400 | 7,200 | 7,100 | 7,000 | 6,900 | 6,700 | 6,800 | 6,500 | 6,900 | 6,700 |
| Vortec 5.3L V8 XFE | 3.08 | 12,200 | - | - | - | - | - | - | - | - | 7,000 | - |
| Vortec 5.3L V8 | 3.08 | 11,500 | 6,600 | 6,500 | 6,400 | 6,300 | 6,200 | 6,000 | 6,100 | 5,800 | 6,200 | 6,000 |
| Vortec 6.0L V8 Hybrid | 3.08 | 12,000 | - | - | - | - | - | - | - | - | 6,100 | 5,900 |
| Vortec 6.2L V8 with MAX Trailering Pack | 3.73 | 16,000 | - | - | - | - | 10,700 | - | 10,400 | - | 10,600 | 10,400 |
| Vortec 6.2L V8 | 3.42 | 15,000 | - | - | - | - | 9,700 | - | 9,400 | - | 9,700 | 9,400 |

SILVERADO 2500HD AND 3500HD CONVENTIONAL TRAILER WEIGHT RATINGS¹

| | REGULAR CAB | | | | | | | | | | | |
|------------------------------|-------------|-------------------|---------------------|---------------------|----------------------------|---------------------|---------------------|----------------------------|--|--|--|--|
| ENGINE | AXLE RATIO | GCWR ² | 2500HD LONG BOX 2WD | 3500HD LONG BOX 2WD | 3500HD LONG BOX 2WD DUALLY | 2500HD LONG BOX 4x4 | 3500HD LONG BOX 4x4 | 3500HD LONG BOX 4x4 DUALLY | | | | |
| Vortec 6.0L V8 | 4.10 | 20,500 | 13,000 | 13,000 | 14,100 | 13,000 | 13,000 | 13,800 | | | | |
| VOI LEC 0.UL V8 | 3.73 | 16,000 | 10,200 | - | 9,600 | 9,900 | 9,700 | 9,300 | | | | |
| Duramay C Cl Turka Biasal VO | 3.73 | 24,500 | 13,000 | - | - | 13,000 | 13,000 | - | | | | |
| Duramax 6.6L Turbo-Diesel V8 | 3.73 | 30,500 | - | - | - | - | - | 16,000 | | | | |

| | EXTENDED CAB | | | | | | | | | | | | |
|---|---------------|-------------------|----------------------------|---------------------|------------------------|-------------------------------|----------------------------|------------------------|------------------------|-------------------------------|--|--|--|
| ENGINE | AXLE RATIO | GCWR ² | 2500HD STANDARD BOX 2WD | 2500HD LONG BOX 2WD | 3500HD LONG BOX 2WD | 3500HD LONG BOX 2WD DUALLY | 2500HD STANDARD BOX 4x4 | 2500HD LONG BOX 4x4 | 3500HD LONG BOX 4x4 | 3500HD LONG BOX 4x4 Dually | | | |
| Vortec 6.0L V8 | 4.10 | 20,500 | 13,000 | 13,000 | 13,000 | 13,600 | 13,000 | 13,000 | 13,000 | 13,400 | | | |
| VUI LEC O.UL VO | 3.73 | 16,000 | 9,800 | 9,700 | 9,500 | 9,100 | 9,500 | 9,400 | 9,200 | 8,900 | | | |
| Vertee 6 OL VO Compressed Natural Cos (CNC) | 4.10 | 20,500 | 13,000 | 13,000 | - | - | 13,000 | 13,000 | - | - | | | |
| Vortec 6.0L V8 Compressed Natural Gas (CNG) | 3.73 | 16,000 | 9,300 | 9,200 | - | - | 9,000 | 8,900 | - | - | | | |
| Donas as C.C. Tauka Biasal VO | 3.73 | 24,500 | 13,000 | 13,000 | 13,000 | - | 13,000 | 13,000 | 13,000 | - | | | |
| Duramax 6.6L Turbo-Diesel V8 | 3.73 | 30,500 | - | - | - | 16,500 | - | - | - | 18,000 | | | |

| | CREW CAB | | | | | | | | | | | | |
|------------------------------|---------------|-------------------|----------------------------|------------------------|----------------------------|------------------------|-------------------------------|----------------------------|------------------------|----------------------------|------------------------|-------------------------------|--|
| ENGINE | AXLE RATIO | GCWR ² | 2500HD Standard Box 2WD | 2500HD Long Box 2WD | 3500HD Standard Box 2WD | 3500HD Long Box 2WD | 3500HD Long Box 2WD Dually | 2500HD Standard Box 4x4 | 2500HD Long Box 4x4 | 3500HD Standard Box 4x4 | 3500HD Long Box 4x4 | 3500HD Long Box 4x4 Dually | |
| Vortec 6.0L V8 | 4.10 | 20,500 | 13,000 | 13,000 | 13,000 | 13,000 | 13,500 | 13,000 | 13,000 | 13,000 | 13,000 | 13,200 | |
| VUI LEC O.UL VO | 3.73 | 16,000 | 9,700 | 9,600 | 9,500 | 9,400 | 9,000 | 9,400 | 9,300 | 9,200 | 9,100 | 8,700 | |
| Duramax 6.6L Turbo-Diesel V8 | 3.73 | 24,500 | 13,000 | 13,000 | 13,000 | 13,000 | - | 13,000 | 13,000 | 13,000 | 13,000 | - | |
| Duramax 6.6L Turbo-Diesei v8 | 3.73 | 30,500 | - | - | - | - | 16,500 | - | - | - | - | 18,000 | |

¹ Maximum trailer weight ratings are calculated assuming a base vehicle, except for any option(s) necessary to achieve the rating, plus driver. The weight of other optional equipment, passengers and cargo will reduce the maximum trailer weight your vehicle can tow. See your Chevy dealer for additional details. 2 Gross Combination Weight Rating.

SILVERADO 1500 FIFTH-WHEEL TRAILER WEIGHT RATINGS¹

Fifth-wheel trailering with a Silverado 1500 requires Z85 Handling/Trailering suspension or Z71 Off-Road suspension. Please read the Trailering Basics on the next page before towing a trailer with any Chevy truck.

| | | | | REGULAR CAB | | EXTENDED CAB | | | |
|---|------------|-------------------|--------------|---------------------|--------------|------------------|--------------|------------------|--------------|
| ENGINE | AXLE RATIO | GCWR ² | LONG BOX 2WD | STANDARD BOX 4x4 | LONG BOX 4x4 | STANDARD BOX 2WD | LONG BOX 2WD | STANDARD BOX 4x4 | LONG BOX 4x4 |
| Vortec 5.3L V8 with Heavy-Duty | 3.42 | 15,000 | 8,900 | - | 9,700 | 9,400 | 9,000 | 9,600 | 8,100 |
| Cooling Package | 3.42 | 14,000 | - | 8,200 | - | - | - | - | - |
| Vortec 6.2L V8 with MAX Trailering Pack | 3.73 | 16,000 | - | - | - | 10,600 | - | 10,300 | - |
| Vortec 6.2L V8 | 3.42 | 15,000 | - | - | - | 9,400 | - | 9,100 | - |

Notes on Silverado 1500: Trailer tongue weight should be 10% to 15% of total loaded trailer weight. Trailer kingpin weight should be 15% to 25% of total loaded trailer weight. Addition of trailer tongue weight/trailer kingpin weight cannot cause vehicle weights to exceed Rear Gross Axle Weight Rating (RGAWR) or Gross Vehicle Weight Rating (GVWR). These ratings can be found on the certification label located on the driver door or doorframe. Fifth-wheel hitch is available as a dealer-installed accessory on select models. See the Trailering Basics for more trailering information.

SILVERADO 2500HD AND 3500HD FIFTH-WHEEL/GOOSENECK TRAILER WEIGHT RATINGS¹

| REGULAR CAB | | | | | | | | | | | | |
|------------------------------|------------|-------------------|---------------------|---------------------|----------------------------|---------------------|---------------------|----------------------------|--|--|--|--|
| ENGINE | AXLE RATIO | GCWR ² | 2500HD LONG BOX 2WD | 3500HD LONG BOX 2WD | 3500HD LONG BOX 2WD DUALLY | 2500HD LONG BOX 4x4 | 3500HD LONG BOX 4x4 | 3500HD LONG BOX 4x4 DUALLY | | | | |
| Vortec 6.0L V8 | 4.10 | 20,500 | 14,700 | 14,500 | 14,200 | 14,400 | 14,200 | 13,800 | | | | |
| VOI LEC B.UL VO | 3.73 | 16,000 | 10,200 | - | 9,600 | 9,900 | 9,700 | 9,300 | | | | |
| Duramax 6.6L Turbo-Diesel V8 | 3.73 | 24,500 | 17,800 | - | - | 17,500 | 17,400 | - | | | | |
| Duramax 6.6L Turbo-Diesei V8 | 3.73 | 30,500 | - | - | - | - | - | 23,100 | | | | |

| EXTENDED CAB | | | | | | | | | | | | | |
|---|------------|-------------------|----------------------------|---------------------|------------------------|-------------------------------|----------------------------|------------------------|------------------------|-------------------------------|--|--|--|
| ENGINE | AXLE RATIO | GCWR ² | 2500HD STANDARD BOX 2WD | 2500HD LONG BOX 2WD | 3500HD LONG BOX 2WD | 3500HD LONG BOX 2WD DUALLY | 2500HD STANDARD BOX 4x4 | 2500HD LONG BOX 4x4 | 3500HD LONG BOX 4x4 | 3500HD LONG BOX 4x4 Dually | | | |
| Vortec 6.0L V8 | 4.10 | 20,500 | 14,300 | 14,200 | 14,000 | 13,700 | 14,000 | 13,900 | 13,700 | 13,400 | | | |
| VUITEC B.UL VO | 3.73 | 16,000 | 9,800 | 9,700 | 9,500 | 9,200 | 9,500 | 9,400 | 9,200 | 8,900 | | | |
| Vertee C.O. V.O. Compressed Natural Cos (CNC) | 4.10 | 20,500 | - | - | - | - | - | - | - | - | | | |
| Vortec 6.0L V8 Compressed Natural Gas (CNG) | 3.73 | 16,000 | - | - | - | - | - | - | - | - | | | |
| Duramay C Cl Turka Biasal VO | 3.73 | 24,500 | 17,500 | 17,400 | 17,300 | - | 16,400 | 15,700 | 16,900 | - | | | |
| Duramax 6.6L Turbo-Diesel V8 | 3.73 | 30,500 | - | - | - | 22,800 | - | - | - | 22,600 | | | |

| | CREW CAB | | | | | | | | | | | | | |
|---------------------------------|---------------|-------------------|-------------------------------|------------------------|----------------------------|------------------------|-------------------------------|----------------------------|------------------------|----------------------------|------------------------|-------------------------------|--|--|
| ENGINE | AXLE RATIO | GCWR ² | 2500HD Standard Box 2WD | 2500HD Long Box 2WD | 3500HD Standard Box 2WD | 3500HD Long Box 2WD | 3500HD Long Box 2WD Dually | 2500HD Standard Box 4x4 | 2500HD Long Box 4x4 | 3500HD Standard Box 4x4 | 3500HD Long Box 4x4 | 3500HD Long Box 4x4 Dually | | |
| Vortec 6.0L V8 | 4.10 | 20,500 | 14,200 | 14,100 | 14,000 | 13,900 | 13,500 | 13,900 | 13,800 | 13,700 | 13,600 | 13,200 | | |
| VOI LEC O.UL VO | 3.73 | 16,000 | 9,700 | 9,600 | 9,500 | 9,400 | 9,000 | 9,400 | 9,300 | 9,200 | 9,100 | 8,700 | | |
| Duramax 6.6L Turbo-Diesel V8 | 3.73 | 24,500 | 17,400 | 16,700 | 17,200 | 17,300 | - | 15,800 | 14,700 | 17,000 | 16,800 | - | | |
| Dui ailiax 0.0L Turbu-Dieser vo | 3.73 | 30,500 | - | - | - | - | 22,800 | - | - | - | - | 22,500 | | |

Notes on Silverado HD: Trailer tongue weight should be 10% to 15% of total loaded trailer weight. Trailer kingpin weight should be 15% to 25% of total loaded trailer weight. Addition of trailer tongue weight/trailer kingpin weight cannot cause vehicle weights to exceed Rear Gross Axle Weight Rating (RGAWR) or Gross Vehicle Weight Rating (GVWR). These ratings can be found on the certification label located on the driver door or doorframe. Fifth-wheel hitch is available as a dealer-installed accessory on select models. See the Trailering Basics for more trailering information.

TAHOE/SUBURBAN TRAILER WEIGHT RATINGS¹

| ENGINE | AXLE RATIO | GCWR ² | TAHOE 2WD | TAHOE HYBRID 2WD | SUBURBAN 2WD | SUBURBAN 3/4-TON 2WD | TAHOE 4WD | TAHOE HYBRID 4WD | SUBURBAN 4WD | SUBURBAN 3/4-TON 4WD |
|--|------------|-------------------|-----------|------------------|--------------|----------------------|-----------|------------------|--------------|----------------------|
| Vortec 5.3L V8 with Heavy-Duty Trailering Package | 3.42 | 14,000 | 8,500 | - | 8,100 | - | 8,200 | - | 8,000 | - |
| Vortec 5.3L V8 | 3.42 | 11,500 | - | - | 5,600 | - | 5,700 | - | - | - |
| vortec 5.3L v8 | 3.08 | 11,000 | 5,500 | - | 5,100 | - | 5,200 | - | 5,000 | - |
| Vartas 6 OL VO | 3.73 | 16,000 | - | - | - | 9,600 | - | - | - | 9,400 |
| Vortec 6.0L V8 | 3.08 | 12.000 | - | 6.200 | - | - | - | 5.900 | - | - |

Notes on Tahoe, Suburban and Tahoe Hybrid: Trailer tongue weight should be 10% to 15% of total loaded trailer weight (up to 1,000 lbs.). Addition of trailer tongue weight must not cause vehicle weights to exceed Rear Gross Axle Weight Rating (RGAWR) or Gross Vehicle Weight Rating (GVWR). The Heavy-Duty Trailering Package (K5L) includes auxiliary external transmission fluid cooler and engine oil cooler.

EXPRESS CARGO VAN TRAILER WEIGHT RATINGS¹

| ENGINE | AXLE RATIO | GCWR ² | 1500 | 1500 AWD | 2500 | 2500 EXTENDED WHEELBASE | 3500 | 3500 EXTENDED WHEELBASE |
|--|------------|-------------------|-------|----------|----------------------------------|-------------------------|----------------------------------|-------------------------|
| Vortec 4.3L V6 | 3.42 | 9,500 | 4,300 | - | - | - | - | - |
| Vortec 4.8L V8 | 3.42 | 13,000 | - | - | 7,400 | 7,200 | 7,400 | 7,100 |
| Vortec 5.3L V8 | 3.73 | 12,000 | 6,700 | - | - | - | - | - |
| voi tec 3.3L vo | 3.42 | 12,000 | 6,700 | 6,500 | - | - | - | - |
| Vortec 6.0L V8 | 3.42 | 16,000 | - | - | 9,900 | 10,000 | 10,000 | 10,000 |
| Vortec 6.0L V8 Compressed Natural Gas (CNG) | 3.42 | 16,000 | - | - | 9,900 (3-Tank) 9,600 (4-Tank) | - | 9,800 (3-Tank) 9,500 (4-Tank) | - |
| Duramax 6.6L Turbo-Diesel V8 | 3.54 | 17,000 | - | - | 10,000 | 10,000 | 10,000 | - |
| Duramax o.or furbo-pieser vo | 3.54 | 18,500 | - | - | - | - | - | 10,000 |

EXPRESS PASSENGER VAN TRAILER WEIGHT RATINGS¹

| ENGINE | AXLE RATIO | GCWR ² | 1500 | 1500 AWD | 2500 | 3500 | 3500 EXTENDED WHEELBASE |
|------------------------------|------------|-------------------|-------|----------|-------|--------|-------------------------|
| Vortec 4.8L V8 | 3.42 | 13,000 | - | - | 6,700 | 9,700 | - |
| Vortec 5.3L V8 | 3.73 | 12,000 | 6,200 | 6,000 | - | - | - |
| voi tec 5.5L vo | 3.42 | 12,000 | 6,200 | 6,000 | - | - | - |
| Vortec 6.0L V8 | 3.42 | 16,000 | - | - | 9,800 | 9,700 | 9,300 |
| Duramax 6.6L Turbo-Diesel V8 | 3.54 | 17,000 | - | - | - | 10,000 | 9,700 |

This chart lists trailer weight ratings for trailering with a weight-distributing hitch. When using a weight-carrying hitch, the maximum trailer weight is 4,000 lbs. with a 400-lb. tongue weight. A weight-distributing hitch and sway control is required for trailer weights greater than 4,000 lbs.

Notes on Express: Trailer tongue weight should be 10% to 15% of total loaded trailer weight (up to 1,000 lbs.). Addition of trailer tongue weight cannot cause vehicle weights to exceed Rear Gross Axle Weight Rating (RGAWR) or Gross Vehicle Weight Rating (GVWR). The standard base cooling system includes all content required to attain maximum trailer weight rating. No optional cooling equipment is available. The Heavy-Duty Trailering Equipment Package (Z82) includes trailer hitch platform and 7-wire trailer wiring harness.

TRAILERING BASICS

Easy and safe trailering requires a properly equipped vehicle, additional trailering equipment and an appropriate trailer. It also requires loading both the vehicle and trailer properly, using safe driving techniques, meeting regional legal requirements, and following break-in and maintenance schedules. The vehicle owner is responsible for obtaining the proper equipment (hitch ball, hitch type of the proper size and capacity) required to safely tow both the trailer and the load that will be towed. Consult your Owner's Manual or speak to a trailering expert at your Chevy dealership for more information.

GOOSENECK/FIFTH-WHEEL TRAILERING

Silverado can be equipped with a fifth-wheel or gooseneck trailer hitch. Follow the manufacturer's directions for installation, but note that the hitch must be attached to the truck frame. Do not use the pickup bed for additional support. For proper kingpin tongue load distribution and control of the trailer, the hitch must be mounted so the kingpin load is placed ahead of the rear axle centerline. Fifth-wheel trailer kingpin loads are higher than conventional trailer tongue loads, so pay careful attention to the truck's payload capacity and rear axle weight ratings. Your Chevy dealer can help you calculate the maximum allowable payload and GVWR required for your fifth-wheel trailering application. The weight of any additional equipment and all passengers must be subtracted from the payload weight to determine the maximum kingpin load available.

WARRANTY INFORMATION

100.000-MILE/5-YEAR TRANSFERABLE POWERTRAIN

LIMITED WARRANTY. Every 2013 Chevrolet passenger car, light-duty pickup, SUV and crossover comes with a 100,000-mile/5-year (whichever comes first) transferable Powertrain Limited Warranty. Plus, you get 100,000 miles/5 years (whichever comes first) of the 24/7 Roadside Assistance Program and the Courtesy Transportation Program and much more. See dealer for details.

NEW VEHICLE LIMITED WARRANTY. GM vehicles registered in the USA are covered for 3 years/36,000 miles (whichever comes first). The complete vehicle is covered, including tires, towing to your nearest Chevrolet dealership and cosmetic corrosion resulting from defects. Repairs will be made to correct any vehicle defect, and most warranty repairs will be made at no charge. In addition, rust-through corrosion will be covered for 6 years/100,000 miles (whichever comes first).

SILVERADO HYBRID AND TAHOE HYBRID WARRANTY. In addition to the transferable Chevrolet 36,000-mile/3-year (whichever comes first) New Vehicle Limited Warranty and the 100,000-mile/5-year (whichever comes first) Powertrain Limited Warranty, GM will also warrant certain hybrid components on Silverado Hybrid and Tahoe Hybrid for 100,000 miles/8 years (whichever comes first). No deductibles are associated with the Silverado/Tahoe Hybrid warranty, which is transferable to any subsequent persons assuming ownership of the vehicle during the 100,000-mile/8-year warranty period. See your Chevrolet dealer for details.

CHEVROLET OWNER CENTER (GMOWNERCENTER.COM/CHEVY).

Register your vehicle with the Chevrolet Owner Center and receive benefits such as online access to your vehicle Owner's Manual, maintenance schedule reminders, service history tracking, warranty and service information, safety information, special offers and privileges, and news and events.

IMPORTANT INFORMATION

ENGINES. Chevrolet products are equipped with engines produced by GM Powertrain or other suppliers to GM worldwide. The engines in Chevrolet products may also be used in other GM makes and models.

ASSEMBLY. Chevrolet vehicles and their components are assembled or produced by different operating units of General Motors, its subsidiaries or suppliers to GM worldwide. We sometimes find it necessary to produce Chevrolet vehicles with different or differently sourced components than originally scheduled. Since some options may be unavailable when your vehicle is assembled, we suggest you verify that your vehicle includes the equipment you ordered and that, if there were changes, they are acceptable to you.

AN IMPORTANT NOTE ABOUT ALTERATIONS AND WARRANTIES. Installations or alterations to the original GM-equipped vehicle (or chassis) are not covered by the General Motors New Vehicle Limited Warranty. The special body company, assembler, equipment installer or upfitter is solely responsible for warranties on the body or equipment and any alterations (or any effect of the alterations) to any of the parts, components, systems or assemblies installed by GM. General Motors is not responsible for the safety or quality of design features, materials or workmanship of any alterations by such suppliers.

ONSTAR. On Star services require vehicle electrical system (including battery), wireless service and GPS satellite signals to be available and operating for features to function properly. On Star acts as a link to existing emergency service providers. Subscription Service Agreement required. Call 1-888-40NSTAR (1-888-466-7827) or visit onstar.com for On Star Terms and Conditions, Privacy Statement, and details and system limitations.

A NOTE ABOUT CHILD SAFETY. Always use safety belts and the correct restraint for your child's age and size. Even in vehicles equipped with the Passenger Sensing System, children are safer when properly secured in a rear seat in the appropriate infant, child or booster seat. Never place a rear-facing infant restraint in the front seat of any vehicle equipped with a passenger air bag. See the Owner's Manual and child safety seat instructions for more information.

IMPORTANT WORDS ABOUT THIS CATALOG. We have tried to make this catalog comprehensive and factual. We reserve the right, however, to make changes at any time, without notice, in prices, colors, materials, equipment, specifications, models and availability. Specifications, dimensions, measurements, ratings and other numbers in this catalog and other printed materials provided at the dealership or affixed to vehicles are approximations based on design and engineering drawings, prototypes and laboratory tests. Your vehicle may differ due to variations in manufacture and equipment. Since some information may have been updated since the time of printing, please check with your Chevrolet dealer for complete details. Chevrolet reserves the right to lengthen or shorten the model year for any product for any reason or to start and end model years at different times. Certain vehicle features may lose their usefulness over time due to obsolescence from technological changes. Unless otherwise noted, all claims based on GM segmentation and latest available competitive information. Excludes other GM vehicles.

SPARE TIRE INFORMATION. There is no standard jack or spare tire in the 2013 Tahoe Hybrid and Commercial Cutaway models. Your vehicle has a tire sealant and compressor kit that uses a liquid tire sealant to temporarily seal up to a one-quarter-inch puncture in the tread area of the tire. After using the tire inflator kit, it is recommended that you take the tire to an authorized retailer for inspection and repair as soon as possible, but at least within 100 miles of driving. The tire sealant cannot seal and inflate sidewall damage, punctures larger than one-quarter inch, or a tire that has unseated from the wheel. The sealant can only be used on one tire and for one time before its expiration date.

 $\label{thm:condition} \textbf{TRAILERING AND OFF-ROAD DRIVING INFORMATION}. Please go to chevy.com and carefully review an Owner's Manual for important safety information about trailering or off-road driving in your vehicle.$

WE'VE GOT YOUR BACK

At Chevrolet, giving you a completely satisfying ownership experience is our top priority. That's why if you ever need assistance, feel free to contact us at these websites or phone numbers.

CHEVY.COM. Offers shopping tools such as Build and Price, Find a Vehicle, Request Info, Email Sign-Up, Compare Vehicles, Financial Tools ... and much more.

GMUPFITTER.COM. Offers nearly everything you need to begin upfitting your Chevy Commercial vehicle, including handling 2-D and 3-D math data; taking hotline questions; and supplying Body Builders Manuals (from 1999 to present), Technical Bulletins and Best Practices Guidelines.

24-HOUR ROADSIDE ASSISTANCE PROGRAM (1-800-CHEV-USA). The Chevrolet Roadside Assistance Program provides you with the following services for 100,000 miles or 5 years (whichever comes first): Emergency Towing (to closest Chevrolet dealer from a legal roadway), Lockout Service (keys locked inside vehicle), Flat Tire Changes (spare installed), Fuel Delivery (\$5 worth of fuel delivered on the road) and Jump Starts (at home or on the road). For specific terms and conditions, please contact your Chevrolet Roadside Assistance advisor at 1-800-243-8872. Some services may incur costs.

COURTESYTRANSPORTATION PROGRAM. Ask your Chevrolet dealer for Courtesy Transportation if you leave your vehicle for extended repairs under the New Vehicle Limited Warranty or Powertrain Limited Warranty. Ask if you qualify for expense reimbursement and/or vehicle rental. Services vary by dealer. Does not apply to Commercial Cutaway Vans.

CHEVROLET CUSTOMER ASSISTANCE CENTER (1-800-222-1020). Talk directly to customer relationship managers who can handle any inquiries related to vehicle operation, warranty coverages, or product or service concerns you may have. Please refer to your Owner's Manual for Customer Assistance information.

CHEVY.COM/SAFETY. Chevrolet is committed to keeping you and your family safe – from the start of your journey to your destination. That's why every Chevrolet is designed with a comprehensive list of safety and security features to help give you peace of mind.

MARKETING AND INCENTIVES (CHEVY.COM/SPECIALOFFERS). Call 1-800-950-CHEV (1-800-950-2438) or visit chevy.com/specialoffers for new product, current incentive and marketing program information.

GMCARDMEMBERSERVICES.COM. Did you know about the family of reward credit cards that can help you get a great deal on a new GM car, light-duty pickup, SUV or crossover? With a GM reward card, you accrue earnings on every credit card purchase to use toward the purchase or lease of an eligible new GM vehicle. With three cards to choose from, you're sure to find one that suits you best.

GM, the GM Logo, Chevrolet, the Chevrolet Logo and the slogans, emblems, vehicle model names, vehicle body designs and other marks appearing in this catalog are the trademarks and/or service marks of General Motors, its subsidiaries, affiliates or licensors. Allison is a registered trademark of Allison Transmission, Inc. @2012 OnStar. All rights reserved. @2012 General Motors. All rights reserved. July 2012



 $\textbf{BUSINESS CHOICE.} \ You \ can \ \text{get the commercial vehicles you depend on every day, equipped with the upfits you need to get the job done. If you are a qualified commercial customer and purchase or lease an eligible Chevy van or truck,$

you have a choice of valuable upfit equipment or card options to meet your business needs. Visit gmbusinesschoice.com for details. Visit chevy.com for special offers and to find a Chevy dealer.



1 To qualify for the GM Business Choice Program, your vehicle must be used in the day-to-day operations of your business and not solely for transportation purposes, and you must provide proof of your business. See your dealer for complete program details.