


STAR SERIES

with
front wheel
drive



SUBARU

STAR 2 DOOR \$1,699^{POE}

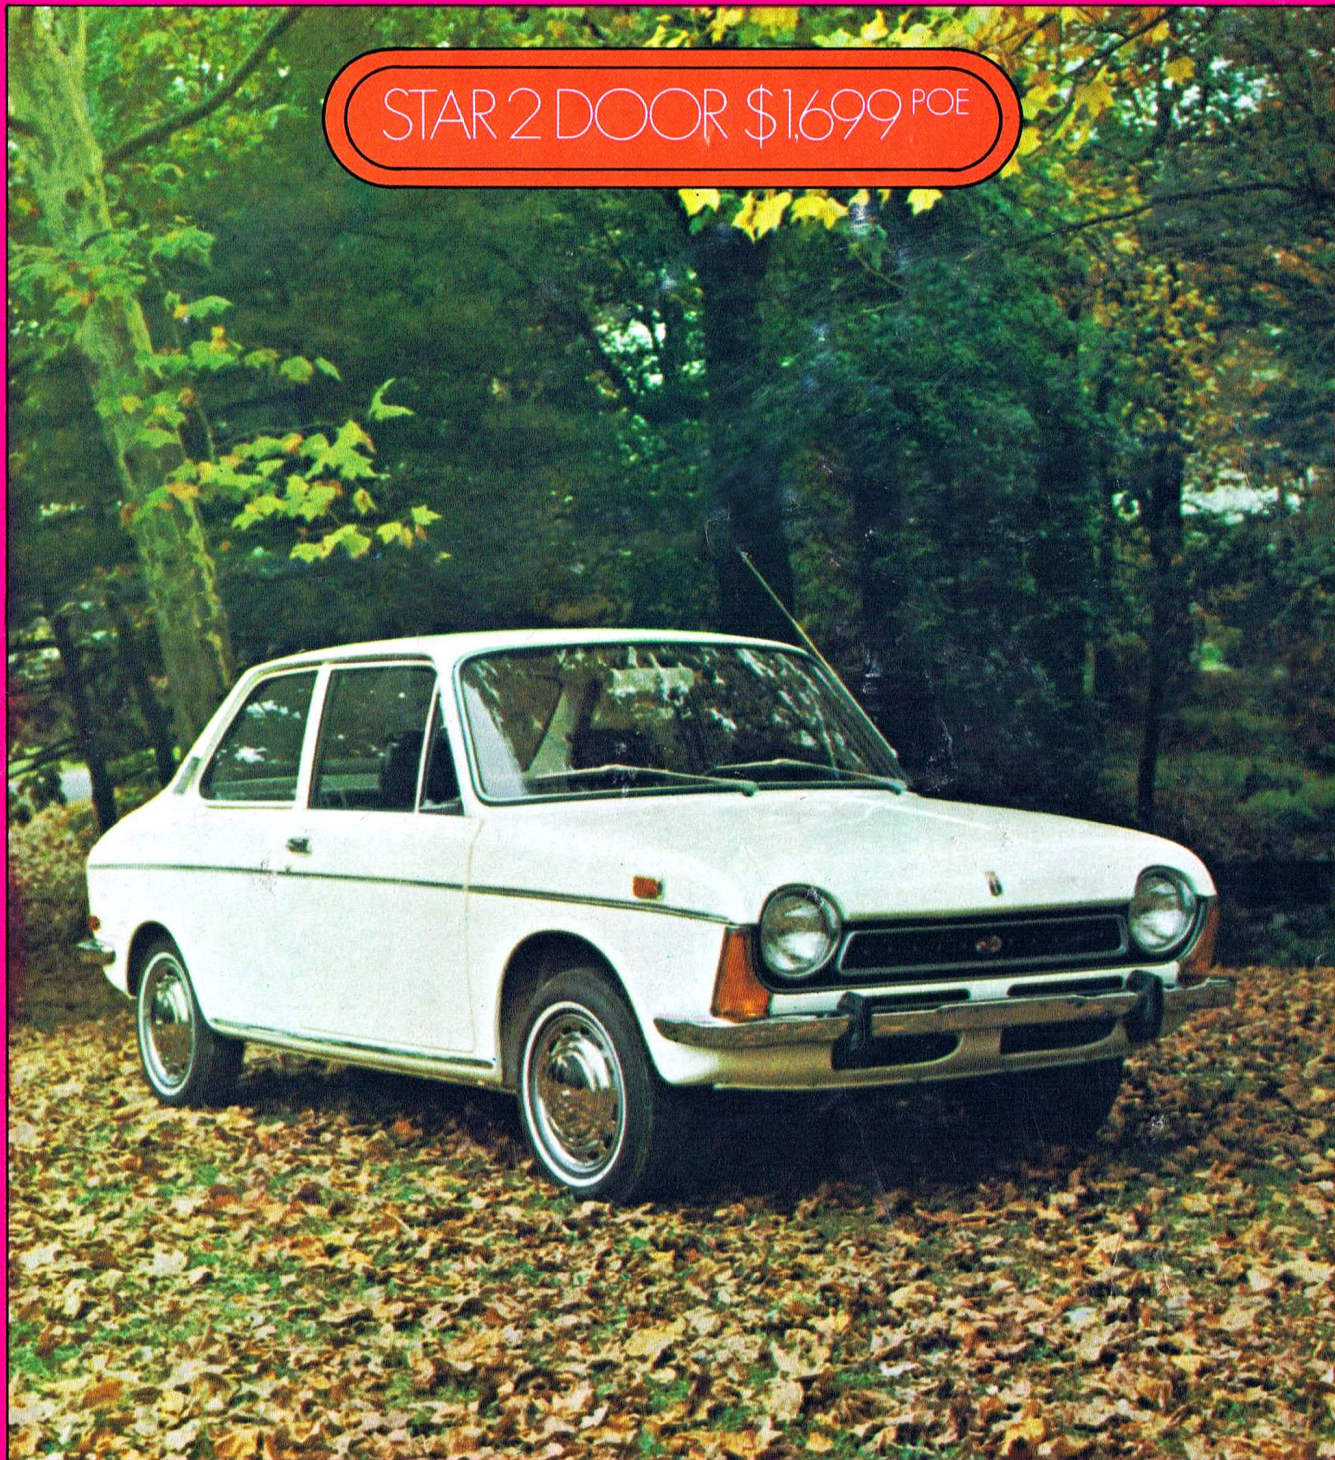

STAR 4 DOOR \$1,799^{POE}



STAR WAGON \$1,899^{POE}



SUBARU STAR SPECIFICATIONS

ITEMS	2-DOOR SEDAN	4-DOOR SEDAN	STATION WAGON	ITEMS	2-DOOR SEDAN	4-DOOR SEDAN	STATION WAGON
DIMENSIONS AND WEIGHTS				TRANSMISSION (Continued)			
Overall Length	155.0 in.	155.0 in.	152.8 in.	Gear Ratios	1st:3.540	1st:3.540	1st:4.000
Overall Width	58.3 in.	58.3 in.	58.3 in.		2nd:2.235	2nd:2.235	2nd:2.438
Overall Height	54.7 in.	54.7 in.	55.7 in.		3rd:1.542	3rd:1.542	3rd:1.542
Cargo Bed Length			57.0 in.		4th:1.033	4th:1.033	4th:1.033
Cargo Bed Width			47.5 in.		Rev.:4.100	Rev.:4.100	Rev.:4.100
Cargo Deck				Final Reduction Gear	Hypoid Gear	Hypoid Gear	Hypoid Gear
Ground Height			15.2 in.	Final Reduction			
Wheel Base	95.2 in.	95.2 in.	95.2 in.	Gear Ratio	4.125	4.125	4.125
Tread Front	48.2 in.	48.2 in.	48.2 in.	CLUTCH			
Tread Rear	47.6 in.	47.6 in.	48.5 in.	Type	Dry Single Plate Diaphragm Type		
Ground Clearance	7.1 in.	7.1 in.	7.1 in.	STEERING SYSTEM			
Vehicle Weight	1,420 lbs.	1,430 lbs.	1,540 lbs.	Type	Rack & Pinion	Rack & Pinion	Rack & Pinion
Seating Capacity	5 adults	5 adults	2 or 5 adults	SUSPENSION			
PERFORMANCE				Front Axle	Wishbone Type Independent Suspension		
Maximum Speed	90 mph	90 mph	90 mph	Rear Axle	Trailing Arm Type Independent Suspension		
Climbing Ability Sin O	0.401	0.397	0.350	Front Spring	Torsion Bar		
Minimum Turning Circle	31.5 ft.	31.5 ft.	31.5 ft.	Rear Spring	Torsion Bar With Coil Spring		
Braking Distance	44.3 ft. at 31 mph	44.3 ft. at 31 mph	42.7 ft. at 31 mph	TIRES			
Cruising Speed	70 mph	70 mph	70 mph	Size and Type	6.15-13-4PR (Low Profile Type)	6.15-13-4PR (Low Profile Type)	6.15-13-6PR (Low Profile Type)
ENGINE				BRAKE SYSTEM			
Model	EA61	EA61	EA61	Front Brake	Duo-Servo (Automatic Adjusting Type)		
Type	2 Pairs Horizontally Opposed, Water-Cooled, 4 Stroke Engine			(Foot Brake)			
Bore x Stroke	2.99 in. x 2.36 in.	2.99 in. x 2.36 in.	2.99 in. x 2.36 in.	Rear Brake	Leading And Trailing		
Piston Displacement	66.4 cu./in.	66.4 cu./in.	66.4 cu./in.	Parking Brake	Mechanical On Front Wheels		
Compression Ratio	9.0:1	9.0:1	9.0:1	BODY			
Maximum Output	62 HP/6,000 rpm	62 HP/6,000 rpm	62 HP/6,000 rpm	Type	Monocoque Type		
Maximum Torque	62.9 lb.-ft./3,200 rpm	62.9 lb.-ft./3,200 rpm	62.9 lb.-ft./3,200 rpm	STANDARD EQUIPMENT / 4 speed transmission / heater & defroster / foam cushion reclining seats / safety package: headrests, seat belts, shoulder straps / turn indicators / hazard lights / windshield wiper (2 speed) / windshield washer / vinyl interiors / back-up lights / padded sun visors / chrome wheel covers / outside rear-view mirror / security locks for engine / directional signals / courtesy lights / adjustable louvre vents / padded dash / flow-through air system / rear opening windows / tool kit / bumper guards / <i>meets all Federal safety standards and smog control regulations.</i>			
Fuel Tank Capacity	9.5 U.S. gal.	9.5 U.S. gal.	9.5 U.S. gal.				
ELECTRICAL EQUIPMENT							
Battery	12V-32AH	12V-32AH	12V-32AH				
Generator	12V-360W	12V-360W	12V-360W				
Starter	12V-600W	12V-600W	12V-600W				
TRANSMISSION							
Number of Speeds	4-Speed Forward, 1-Reverse						
Transmission Type	Synchroneshed On All 4 Forward Speeds, Selective Sliding On Reverse						

SUBARU OF AMERICA

EASTERN DIVISION / 7040 CENTRAL HIGHWAY / AIRPORT CIRCLE INDUSTRIAL PARK / PENNSAUKEN, NEW JERSEY 08109
WESTERN DIVISION / 1000 WEST COAST HIGHWAY / NEWPORT BEACH, CALIFORNIA 92660